




Supplementary Submittal For 5000 & 5100 Series Multiblade Dampers Single Indication Whisker Type Blade Position Switch

BLADE POSITION INDICATOR SWITCHES

- Top Mounted, to Indicate Full Closed (2 wires)
- Bottom Mounted, to Indicate Full Open (2 Wires)

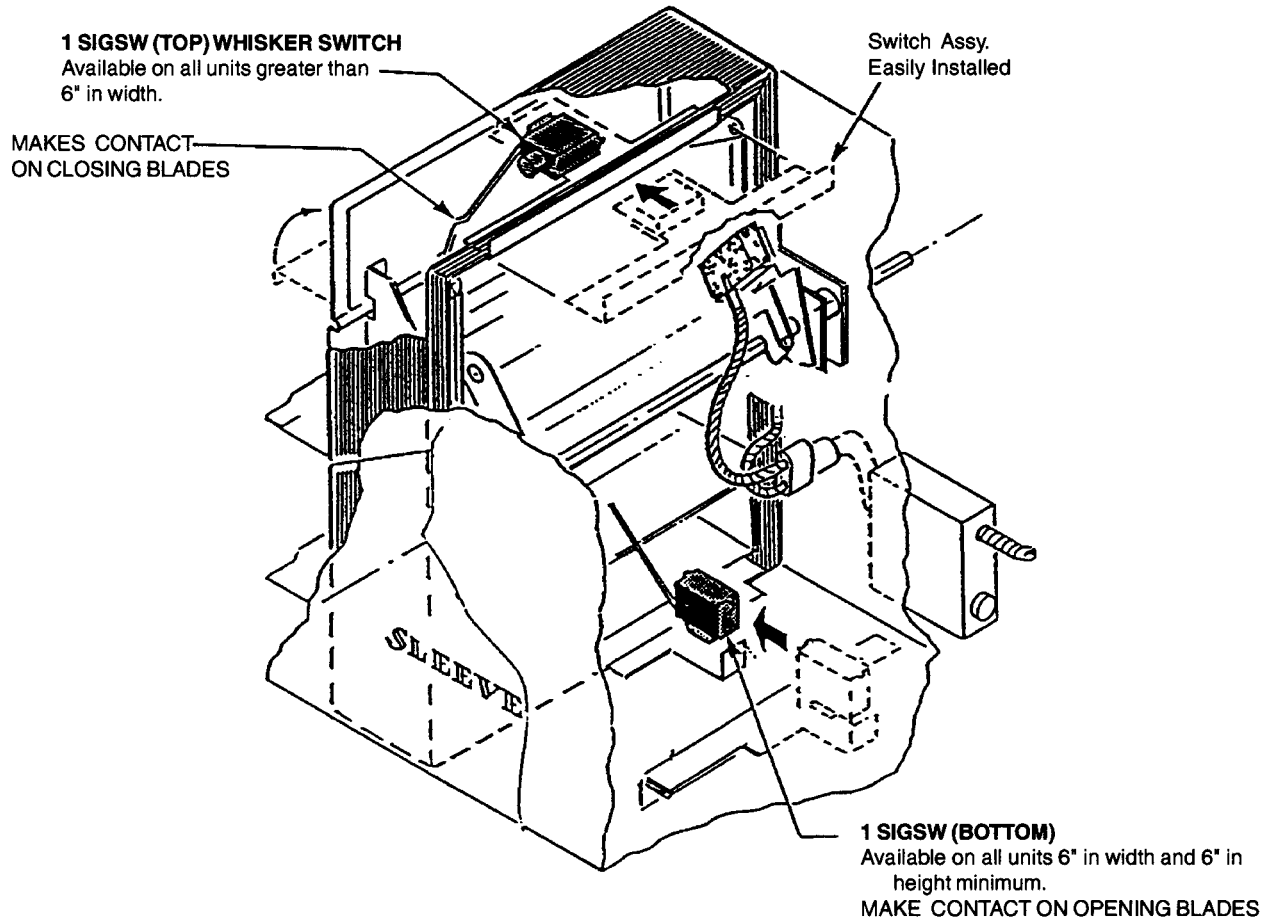

NOTES:

1. All switches are set to indicate within 15° closure, but only double switches will indicate within 15° of both Open & Closed.
2. All switches are UL rated up to 230V. AC/15 Amps.
3. Mounting brackets and hardware included.
4. All switches require 2 wires for one position (Closed or Open) indication and 3 wires for two-position indications. Optional factory wiring assembly includes a 3/8" Greenfield and Connector into switch enclosure with 6" wire leads extending out of flexible conduit. The switch is wired with 16 AWG stranded wires (3 leads) connected as follows:
BLACK - Common Terminal
BLUE - Normally Open Terminal
RED - Normally Closed Terminal

REPRESENTED BY

MANUFACTURED BY
PERFECT AIR CONTROL, INC.
1310 N. HERCULES AVE. CLEARWATER, FL 33765
CUSTOMER SERVICE (800) 437-6653 * ORDER ENTRY FAX (727) 431-6074
www.prefco-hvac.com